


# Energy stored in a charged capacitor


10.1

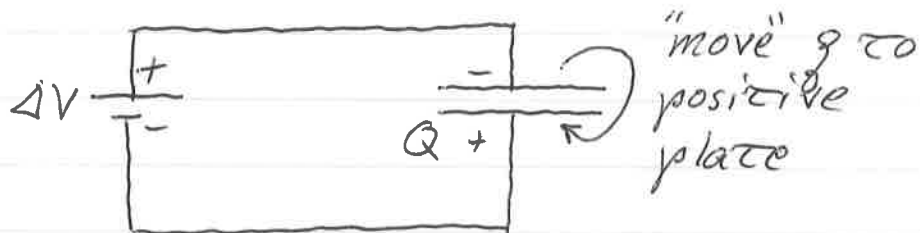

To understand the energy stored, need to consider work done to put charge on capacitor

Move positive charge  $dq$  to 'positive' plate. (assume mass = 0)

- initially, no work to move it
- work required once some charge on plate

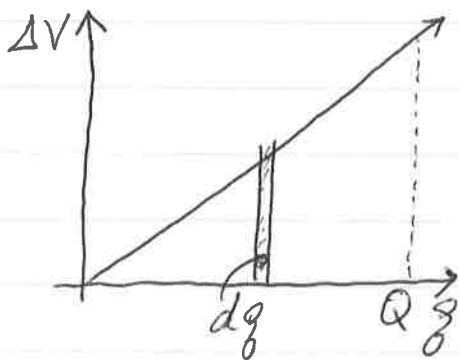

- higher potential

$$\begin{aligned} dW &= \Delta V dq \\ &= \frac{Q}{C} dq \end{aligned}$$

10.2

To get total work, need to sum (integrate) over all charges as  $\Delta V$  increases

$$\underline{\underline{W}} = \int_0^Q \frac{q}{C} dq = \frac{1}{C} \int_0^Q q dq$$

TOTAL  
WORK

$$= \boxed{\frac{Q^2}{2C}}$$

This is essentially what a battery does to a capacitor when it forces charge to build up there.


Considering  $C = Q/V$ , we have

$$W = \frac{(CV)^2}{2C} = \frac{CV^2}{2}$$

$$\boxed{W = \frac{CV^2}{2}}$$

Example:

10.3

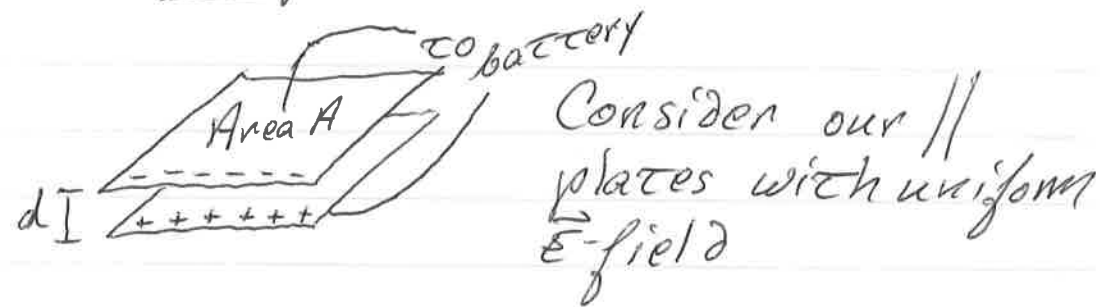

Disconnect the battery & increase separation to  $d'$

What happens to:

$C \Rightarrow \epsilon_0 A/d$  so decreases

$Q \Rightarrow$  stays same

$\vec{E} \Rightarrow \sigma/\epsilon_0$  so stay same

$V \Rightarrow q/c$  so increases as  $C \downarrow$

$W \Rightarrow \frac{1}{2} \frac{q^2}{C}$  so increases


The dependence is coming from  $C \propto d^{-1}$  dependence.

$\therefore W$  increases linearly with increasing separation


## Stored Energy

10.4

Let's consider a circuit with two || plate capacitors

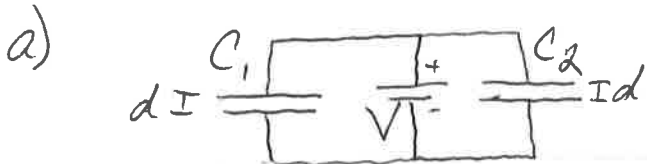

What happens if we remove  $C_1$  and reduce separation by half?

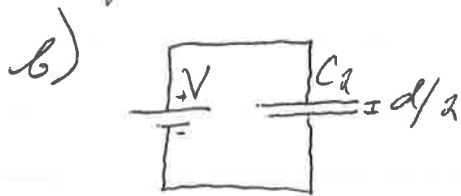

a)  $C_{\text{eff}} = C_1 + C_2$   
 $= \underline{\underline{2\epsilon_0 A/d}}$

Work needed  $= \underline{\underline{\frac{2\epsilon_0 A}{2d} V^2}}$

This is equal to the potential energy difference between having charge + not having charge on  $C_1 + C_2$ .

$U = \frac{\epsilon_0 A}{d} V^2$   $(= \frac{1}{2} CV^2)$

Now consider b)

$$C_2 = \epsilon_0 A / (d/2) = 2\epsilon_0 A / d$$

The energy stored is

$$\underline{U} = \frac{1}{2} C V^2 = \underline{\frac{\epsilon_0 A}{d} V^2}$$

which is the same as in a)

So we see adding in parallel acts like re-engineered  $C_2$

- and we get same benefit of energy stored

## Energy Density

10.6

The potential energy difference between charged & uncharged capacitors

- means an equivalent energy 'stored' by capacitor

- think of it as kinetic energy give to charges to allow the E-field to move them back

Sometimes want to know energy per volume, 'energy density'. Consider constant field case

- parallel plate capacitor

$$W = \frac{1}{2} \frac{Q^2}{C} = \frac{Q^2}{2\epsilon_0 Ad}$$

10.7

The electric field is

$$\epsilon = \frac{Q}{\epsilon_0 A} = \frac{Q}{\epsilon_0 A} \quad \therefore Q = \epsilon_0 A \epsilon$$

So that

$$\begin{aligned} \underline{W} &= \frac{1}{2} \frac{(\epsilon_0 A \epsilon)^2}{\epsilon_0 A d} \\ &= \boxed{\frac{\epsilon_0 A d \epsilon^2}{2}} \end{aligned}$$

To calculate the energy density


$$u = \frac{W}{\text{volume}} = \frac{W}{Ad}$$

$$\boxed{u = \frac{1}{2} \epsilon_0 \epsilon^2} \quad \text{Joules/m}^3$$

Example

10.8

Consider two cylindrical capacitors:

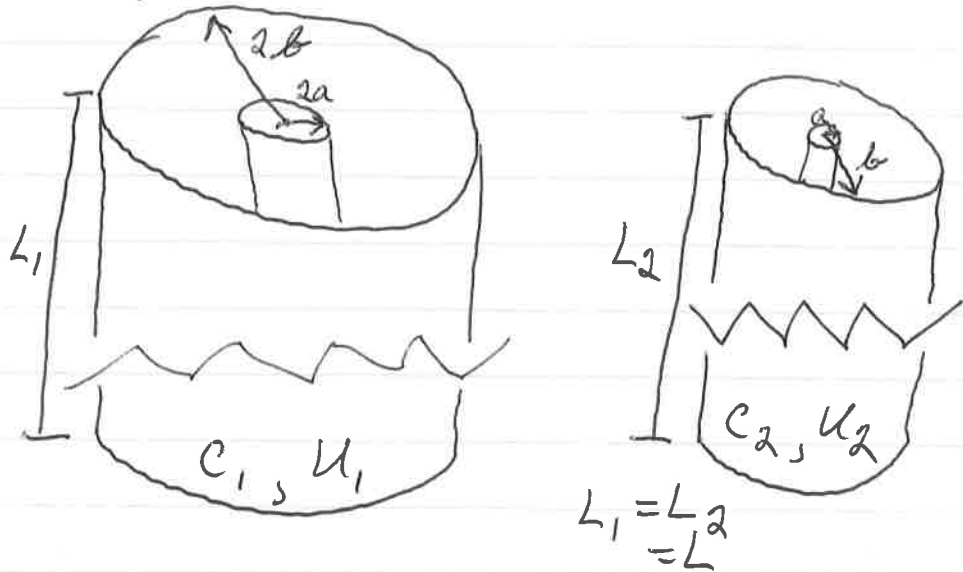

Both capacitors given same amount of charge.

Is energy stored,  $U_1$ , greater less than or equal to  $U_2$ ?



10.9

Capacitance for a cylinder,

$$C = L / (2k \ln(b/a))$$

which gives energy

$$U_i = \frac{1}{2} C_i V^2 = \frac{Q^2}{2C_i}$$

$$\begin{aligned} U_1 / U_2 &= \frac{\frac{1}{2} Q^2 / C_1}{\frac{1}{2} Q^2 / C_2} = \frac{C_2}{C_1} = \frac{L / (2k \ln(b/a))}{L / (2k \ln(2b/2a))} \\ &= \frac{k \ln(2b/2a)}{k \ln(b/a)} = \underline{\underline{1}} \end{aligned}$$

So capacitors store same amount of energy  $U_1 = U_2$