

PHYS 1307

SOLVING PHYSICS PROBLEMS

Many students, even if they are good at other sciences, math, or engineering, often find physics problems very difficult because they do not adopt the right approach for physics. Physics consists of a very small number of conceptually-deep basic laws that are combined with mathematical methods to solve problems in the real world; no other subject works like this. Physics problems are like mystery stories - you often don't know who dunnit until the very end.

- **Don't search for "the right equation"**. You will not be able to solve a real physics problem by finding an appropriate equation and then plugging numbers into it. No self-respecting college-level teacher would assign such a problem.

- **Don't memorize**. In physics you should not need to memorize anything (equations for basic laws should be available in your book or on a formula sheet) and it will not help you solve problems. It is important you understand the meaning of equations that express basic laws, and memorization usually indicates a simple lack of this conceptual understanding.

Below is a more detailed format it is suggested you use when solving *all* physics problems, even if you are sure you know how to get the answer. This skill will help you to solve physics problems and also to explain your solution to a reader (who may be the grader, yourself 2 months later, or the Nobel Prize committee). If your final answer is wrong, you will receive partial credit for following this format.

D I A N A

DESCRPTION/ **D**IAGRAM – define unique symbols for unknowns sought and data given, label a diagram with your symbols, include a directed coordinate system, a few words to clarify perhaps.

IDEA – state the fundamental idea(s) or principle(s) of physics you will use. This can be expressed via an equation chosen from the formula sheet. You should then write it out explicitly for the current problem using your symbols (don't just write numbers immediately).

ANALYSIS – symbolically derive the unknown you want using algebra and calculus

NUMBERS – substitute data for the knowns and perform calculation of the unknown

ANSWER – check number makes sense, round to appropriate precision, put units

For more detailed advice about how to approach physics problems, see Dan Styler's page <http://www.oberlin.edu/physics/dstyler/SolvingProblems.html>

Grading Scheme Explanation

Each check mark is worth one point. The grader may sometimes mark an X by or circle something wrong or they may offer advice in brackets; all this is for information only.

Check marks are embellished in 3 ways:

1. Diagram and/or Description (D) – see above
2. Method (M) - This is for *any valid* Method that forms part of the Idea or Analysis steps.
3. Answer (A) - This is for the correct final Answer, including units and appropriate precision.
You will lose ½ point on an Answer (A) if either of the following occurred:
a) wrong units b) inappropriate precision (you cannot lose more than one ½ point due to precision on the test.)

Carry Through Error (CTE) - an incorrect Answer (A) or diagram (D) *may* be awarded the points if it resulted from the use of a previous erroneous answer. The directly preceding method (M) points must have been awarded and the previous erroneous answer should not have simplified the problem. CTE points are awarded at the discretion of the grader.

Exemplary Solutions

Chap 1 Problem. To an appropriate number of significant figures for the data given, how many U.S. gallons of gasoline are in one litre?

[1 U.S. gallon = 231 in³, 1 L = 10⁺³ cm³ (exact definition), 1 in = 2.54cm]

Analysis (1 points)

$$1 \text{ L} = \frac{1 \text{ L}}{\text{cm}^3} \frac{\text{cm}^3}{\text{in}^3} \frac{\text{in}^3}{\text{gal}} \text{ gal}$$

Numbers (1 point use of data)

$$= 10^3 (2.54)^{-3} (231)^{-1} \text{ gal}$$

$$= 0.26417 \text{ gal}$$


Answer (1 point)

$$= \underline{0.264} \text{ gal (2sf)}$$

Chap 2 Problem. A stone is thrown from the top of a building with an initial velocity of 10.0 m/s upwards. The top of the building is 100 m (3sf) above the ground. What is the speed of impact?

[Neglect air resistance and assume $g = 9.80 \text{ m/s}^2$]

Diagram/Description (2 points)

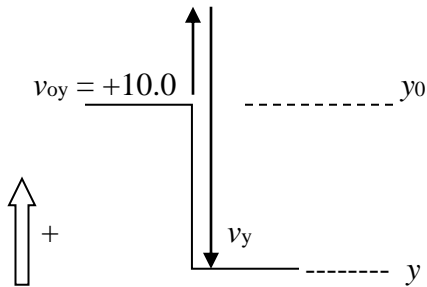

$$a_y = -9.80 \text{ m/s}^2$$

$$y - y_0 = -100 \text{ m (change in } y)$$

v_y velocity just before impact **this is what speed of impact means**

Idea (1 point)

$$v_y^2 = v_{0y}^2 + 2 a_y (y - y_0) \quad \text{since constant acceleration}$$

Analysis (no points)

$$v_y = \sqrt{v_{0y}^2 + 2 a_y (y - y_0)}$$

Numbers (no points)

$$\begin{aligned} &= \sqrt{[10^2 + 2(-9.8)(-100)]} \\ &= 45.37 \end{aligned}$$

Answer (1 point)

$$= \underline{45.4 \text{ m/s}} \quad (3\text{sf})$$

Chap 4 Problem. A rifle that shoots bullets at 460 m/s is to be aimed at a target 45.7 m away. If the center of the target is level with the rifle, how high above the target must the rifle barrel be pointed so that the bullet hits dead center? [$2 \sin \theta \cos \theta = \sin 2\theta$]

Diagram/Description (2 points)


$$v_0 = 460 \text{ m/s}$$

$$x - x_0 = d = 45.7 \text{ m}$$

$$a_x = 0$$

$$a_y = -9.80 \text{ m/s}^2$$

$$y - y_0 = 0 \text{ (no change in } y \text{)}$$

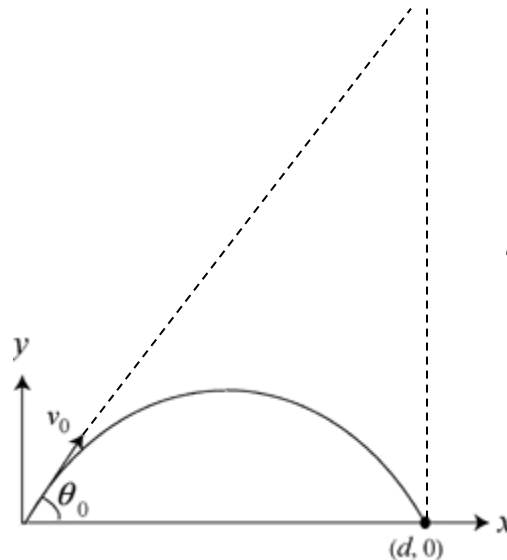

Idea (2 points)

$$x - x_0 = v_{0x} t + \frac{1}{2} a_x t^2 \quad d = v_0 \cos \theta_0 t \quad \text{constant acceleration}$$

$$y - y_0 = v_{0y} t + \frac{1}{2} a_y t^2 \quad 0 = v_0 \sin \theta_0 t + \frac{1}{2} a_y t^2$$

$$l = d \tan \theta_0$$

Analysis (1 point)

$$t = d / v_0 \cos \theta_0$$

$$0 = t (v_0 \sin \theta_0 + \frac{1}{2} a_y t) \quad \text{cancel } t = 0 \text{ solution (launch time).}$$

$$v_0 \sin \theta_0 = -\frac{1}{2} a_y d / v_0 \cos \theta_0 \quad \text{substitute for } t$$

$$\sin \theta_0 \cos \theta_0 = -\frac{1}{2} a_y d / v_0^2$$

$$\theta_0 = \frac{1}{2} \sin^{-1} [- a_y d / v_0^2]$$

Numbers (no points)

$$= \frac{1}{2} \sin^{-1} [9.80 \times 45.7 / 4 \times 460^2]$$

$$= 0.0606^\circ$$

$$l = 45.7 \tan 0.0606$$


$$= 0.484$$

Answer (1 point)

$$= \underline{0.484 \text{ m}} \quad (3\text{sf})$$

Chap 5/6 Problem. Holding on to a towrope moving parallel to a frictionless ski slope, a 50 kg skier is pulled up the slope, which is at an angle of 8.0° with the horizontal. What is the magnitude of the force on the skier from the rope when the magnitude v of the skier's velocity is $v = 2.0$ m/s as v increases at a rate of 0.10 m/s²?

Diagram/Description (2 points)

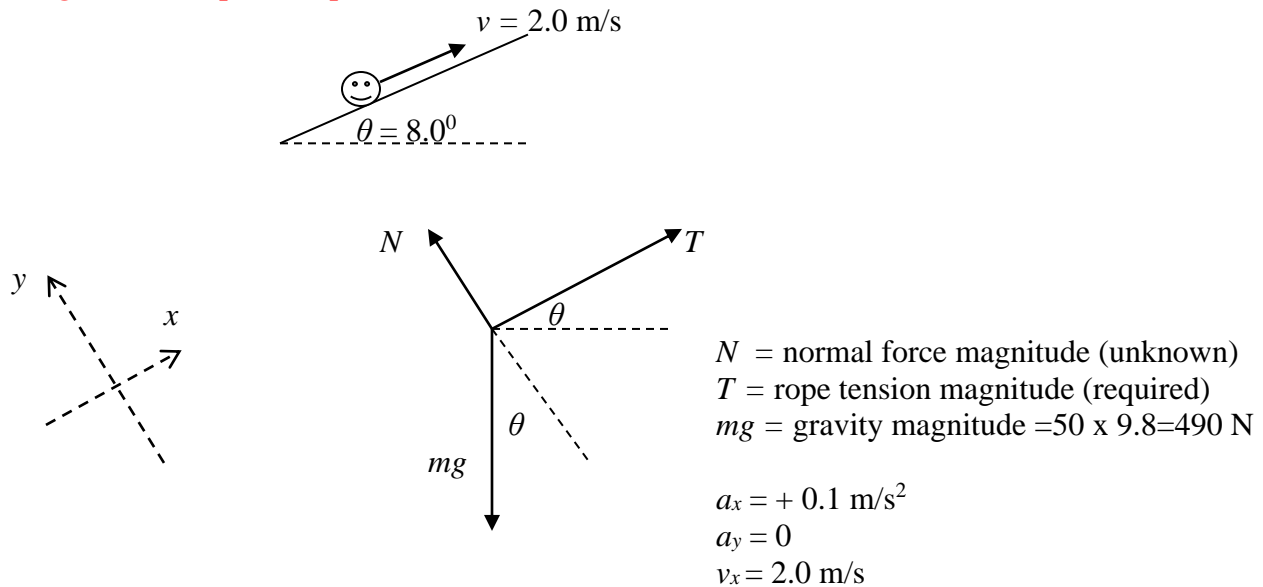

Idea (1 point)

$$\Sigma \underline{F} = m\underline{a}$$

$$x: T - mg \sin \theta = m a_x$$

$$y: N - mg \cos \theta = m a_y$$

Numbers (no points)

$$T = 50 \times 9.80 \times \sin 8.0^\circ + 50 \times 0.1 \quad v_x \text{ not needed}$$


$$= 73.1948$$

Answer (1 point)

$$= \underline{73 \text{ N}} \quad (2\text{sf})$$

Chap 7 Problem. Boxes are transported from one location to another in a warehouse by means of a conveyor belt that moves with a constant speed of 0.50 m/s. At a certain location the conveyor belt moves for 2.0 m up an incline that makes an angle of 10° with the horizontal. Assume that a 2.0 kg box rides on the belt without slipping. At what rate is the conveyor belt doing work on the box?

Diagram/Description (1 point)



Box mass $m = 2.0$ kg
 Box speed $v = 0.50$ m/s constant
 Box distance $\Delta r = 2.0$ m
 Forces are static friction, normal, and gravity, all constant.
 Friction and Normal are due to conveyor.


Idea (2 points)

$$W = \underline{\mathbf{F}} \bullet \underline{\Delta \mathbf{r}} = F \Delta r \cos \theta$$

$$P = W / \Delta t$$

$$v = \Delta r / \Delta t \quad \text{since constant velocity}$$

Diagram/Description (1 point)

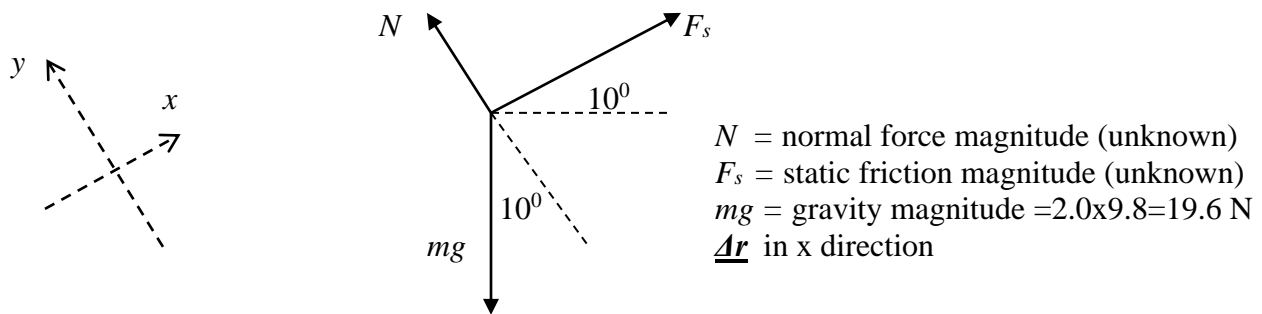

Idea (2 points)

$$\text{Work done by } N : \quad W = N \Delta r \cos 90^\circ = 0$$

$$\text{Work done by } F_s : \quad W = F_s \Delta r \cos 0^\circ = F_s \Delta r$$

$$\Sigma F_x = ma_x = 0 \quad \text{constant velocity}$$

$$+ F_s - mg \sin 10^\circ = 0$$

Analysis (no points)

$$W = mg \sin 10^\circ \Delta r$$
$$P = mg \sin 10^\circ \Delta r / \Delta t$$
$$= mg \sin 10^\circ v$$

Numbers (points given in Description for use of data)


$$= 19.6 \times \sin 10^\circ \times 0.50$$
$$= 1.7017$$

Answer (1 point)

$$= \underline{1.7 \text{ W}} \quad (2\text{sf})$$

Chap 8 Problem A blood clot is moving horizontally through an artery and then encounters a 10° upslope. The clot travels 9.20 cm up the slope before stopping. Assuming the resistive forces are negligible, what was the initial speed of the clot?

Diagram/Description (1 point)

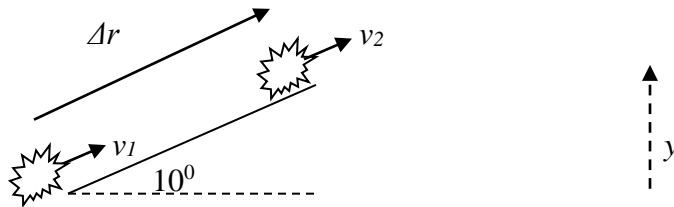

clot mass m (unknown)
clot initial speed v_1 (required)
clot final speed $v_2 = 0$
clot distance $\Delta r = 9.20 \text{ cm}$

Idea (2 points)


$$\Delta E = \Delta K + \Delta U = 0 \quad \text{mechanical energy conserved}$$

$$K_1 + U_1 = K_2 + U_2$$

$$\frac{1}{2} m v_1^2 + m g y_1 = \frac{1}{2} m v_2^2 + m g y_2$$
$$\frac{1}{2} m v_1^2 = + m g y_2 - m g y_1$$

Diagram/Description (1 point)

$$y_2 - y_1 = \Delta y$$



$$\Delta y / \Delta r = \sin 10^\circ$$

$$10^\circ$$

$$\Delta y$$

Analysis (no points)

$$\frac{1}{2} m v_I^2 = m g \Delta y$$

$$v_I^2 = 2 g \Delta y$$

$$v_I = \sqrt{(2 g \Delta y)}$$

Numbers (points given in Description for use of data)

$$= \sqrt{(2 \times 9.8 \times 0.0920)}$$

$$= 0.55957$$

Answer (1 point)

$$= \underline{56 \text{ cm/s}} \quad (2\text{sf})$$

Chap 9 Problem. Two bison approach each other head-on with the same speed and collide elastically. After the collision, one of the bison, whose mass is 300kg, remains at rest. What is the mass of the other bison?

Diagram/Description (1 point)



mass $m_1 = 0.300 \text{ kg}$

mass m_2 required

initial speeds equal $v_{1i} = v_{2i}$

final speeds: $v_{1f} = 0$; v_{2f} unknown

-----> + direction

Idea (2 points)

$\underline{p}_{1i} + \underline{p}_{2i} = \underline{p}_{1f} + \underline{p}_{2f}$ system linear momentum conserved

$$+ m_1 v_{1i} - m_2 v_{1i} = + m_2 v_{2f}$$

$K_{1i} + K_{2i} = K_{1f} + K_{2f}$ system kinetic energy conserved (elastic collision)

$$\frac{1}{2} m_1 v_{1i}^2 + \frac{1}{2} m_2 v_{1i}^2 = \frac{1}{2} m_2 v_{2f}^2$$

Analysis (1 point)

Substitute for v_{2f}

$$v_{2f} = (m_1 - m_2) v_{1i} / m_2$$

$$\frac{1}{2} v_{1i}^2 (m_1 + m_2) = \frac{1}{2} m_2 [(m_1 - m_2) v_{1i} / m_2]^2$$

$$(m_1 + m_2) = (m_1 - m_2)^2 / m_2$$

$$m_2 m_1 + m_2^2 = m_1^2 - 2 m_2 m_1 + m_2^2$$

$$0 = m_1 (m_1 - 3 m_2)$$

$$m_1 = 3 m_2$$

v_{1i} cancels, so value not needed.

since $m_1 \neq 0$

Numbers (points given in Description for use of data)

$$m_2 = 300/3$$


$$= 100$$

Answer (1 point)

$$= \underline{100\text{kg}} \quad (3\text{sf})$$

Chap 10 Problem. The length of a child's forearm is 0.152 m and its mass is 0.35 kg. A downward force of 111 N is applied to the hand. (a) What is the torque about the elbow when the forearm is at angle 30° to the upward vertical? (b) What is the angular acceleration of the forearm arm at this time? (*assume the forearm is a thin uniform rod and no muscular resistance occurs*)


Diagram/Description (2 points)



\underline{F} applied at \underline{r} produces a clockwise torque about O

$$r = 0.152 \text{ m}$$

$$\text{mass } m = 0.35 \text{ kg}$$

choose  + direction clockwise

a)

Idea (1 point)

Torque magnitude

$$\tau = rF \sin \phi$$

Numbers (points given in Description for use of data)

$$\begin{aligned}\tau &= 0.152 \times 111 \times \sin 150^\circ \\ &= 8.436\end{aligned}$$

Answer (1 point)

$$\underline{\tau} = +8.4 \text{ Nm} \quad (2\text{sf})$$

The + sign together with the clockwise convention chosen above are necessary for indicating the torque vector. Alternatively, by the right hand rule, the vector direction may be specified as “into the page”.

b)

Idea (1 point)

$$\tau = I \alpha$$

$\underline{\tau}$ and $\underline{\alpha}$ same direction (I scalar)

$$I = mr^2 / 3$$

Formula for rotational inertia of a given shape would be given to you in a test question

Analysis (no points)

$$\alpha = \tau / I = 3 \tau / mr^2$$

Numbers (points given in Description for use of data)

$$\begin{aligned}\alpha &= 3 \times 8.436 / (0.35 \times 0.152^2) \\ &= 3129\end{aligned}$$

Use the unrounded value of τ calculated in part a), otherwise you risk making a rounding error on final answer


Answer (1 point)

$$\underline{\alpha} = +3.1 \times 10^3 \text{ rad/s}^2 \quad (2\text{sf})$$

The + sign together with the clockwise convention chosen above are necessary for indicating the angular acceleration vector. Alternatively, by the right hand rule, the vector direction may be specified as “into the page”.

Chap 11 Problem. A horizontal circular platform of mass 0.10 kg and radius 0.10 m rotates freely about a vertical axis through its center with an angular speed of 4.7 rad/s and a rotational inertia of $5.0 \times 10^{-4} \text{ kgm}^2$. Some gunk of mass 0.020 kg drops vertically onto the platform from above and sticks to the edge of the platform. What is the angular speed of the platform immediately afterwards?

Diagram/Description (1 point)

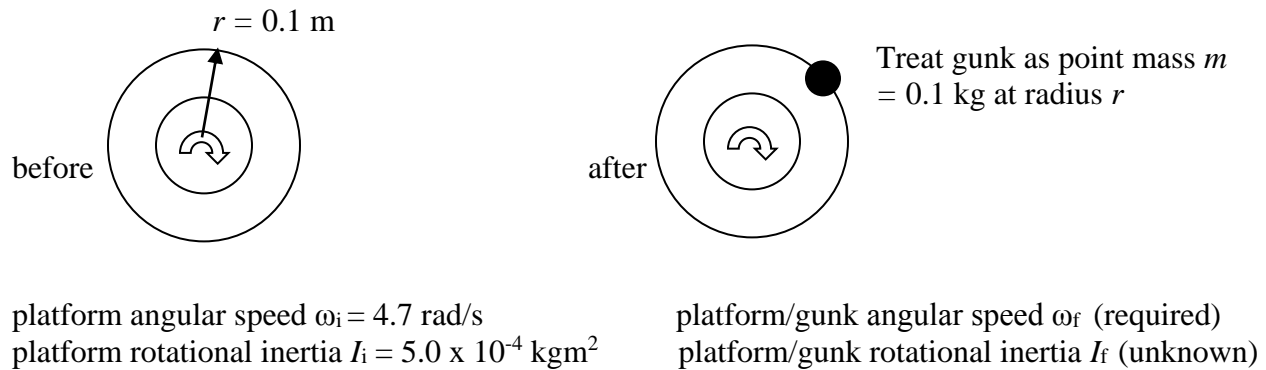

choose + direction clockwise

Idea (2 points)

$$I_i \omega_i = I_f \omega_f$$

$$I_f = I_i + mr^2$$

Analysis (no points)

$$\omega_f = I_i \omega_i / I_f = I_i \omega_i / (I_i + mr^2)$$

Numbers (points given in Description for use of data)


$$= 5.0 \times 10^{-4} \times 4.7 / (5.0 \times 10^{-4} + 0.1 \times 0.1^2)$$

$$= 1.5666$$


Answer (1 point)

$$= \underline{1.6 \text{ rad/s}} \quad (2\text{sf})$$

Chap 12 Problem. A bowler holds a bowling ball of mass 7.2 kg in the palm of his hand as shown. His upper arm is vertical; his lower arm of mass 1.8 kg is horizontal. What is the magnitude of (a) the force of the biceps muscle on the lower arm and (b) the force between the bony structures at the elbow contact point?

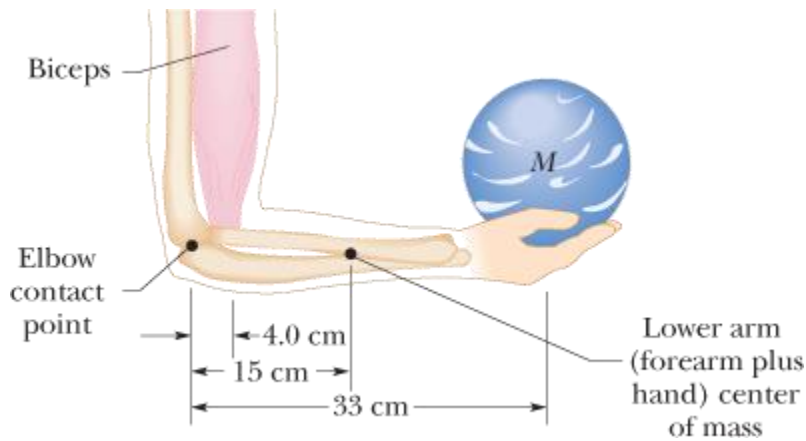

Diagram/Description (2 point)

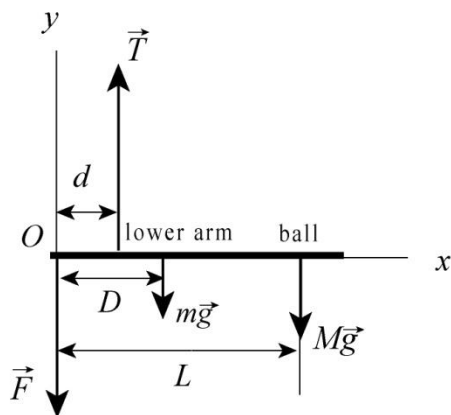

\vec{T} = biceps muscle tension (required)

\vec{F} = tension in elbow joint (required)

$m\vec{g} = 1.8 \times 9.8 = 17.64 \text{ N}$

$M\vec{g} = 7.2 \times 9.8 = 70.56 \text{ N}$

$D = 0.15 \text{ m}$

$d = 0.04 \text{ m}$

$L = 0.33 \text{ m}$

choose \curvearrowright + direction anti-clockwise

Idea (2 points)

$$\Sigma \underline{F} = 0$$

$$\Sigma_O \underline{\tau} = 0$$

Hint: choose O as shown since F (unknown) has then no torque

$$y: T - Mg - mg - F = 0$$

$$dT - Dmg - LMg = 0$$

(a)

(Analysis, Numbers)

Answer (1 point)

$$T = \frac{(mD + ML)g}{d} = \frac{[(1.8 \text{ kg})(0.15 \text{ m}) + (7.2 \text{ kg})(0.33 \text{ m})](9.8 \text{ m/s}^2)}{0.040 \text{ m}}$$

$$= 648 \text{ N} \approx 6.5 \times 10^2 \text{ N.}$$

(b)


Analysis (1 point)

Substitute T into force equation

Answer (1 point)


$$F = T - (M + m)g = 648 \text{ N} - (7.2 \text{ kg} + 1.8 \text{ kg})(9.8 \text{ m/s}^2) = 560 \text{ N} = 5.6 \times 10^2 \text{ N.}$$

Chap 14 Problem. An alligator waits for prey by floating with only the top of its head exposed. One way it can adjust the extent of sinking is by controlling the size of its lungs. Another way may be by swallowing stones (*gastrolithes*) that then reside in the stomach. The Figure shows a highly simplified model (a “rhombhedron gater”) of mass 130 kg that roams with its head partially exposed. The top head surface has area 0.20 m^2 . If the alligator were to swallow stones with a total mass of 1.0% of its body mass (a typical amount), how far would it sink? [Take the density of water as 998 kg/m^3]

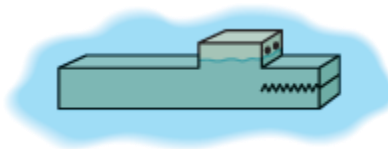

Diagram/Description (1 point)

All body stays submerged.
Head partially submerged,
water level changes by Δh
when stones swallowed

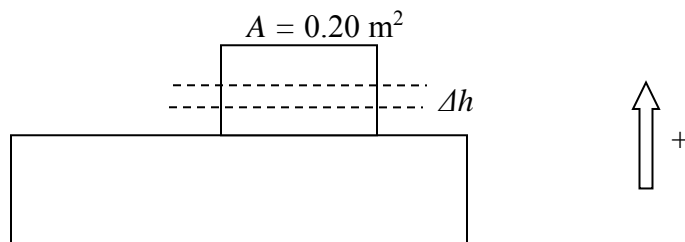

alligator mass $m = 130 \text{ kg}$
stones mass $\Delta m = 0.010 \times 130 \text{ kg}$
 $\rho = 998 \text{ kg/m}^3$

Idea (2 points)

Archimedes' principle: buoyancy force (weight of water displaced) = weight of alligator

If alligator mass increases by Δm then

$$\rho A \Delta h g = \Delta m g$$

Analysis (no points)

$$\Delta h = \Delta m / \rho A$$

Numbers (points given in Description for use of data)

$$\begin{aligned} &= 0.010 \times 130 / (998 \times 0.20) \\ &= 6.4870 \times 10^{-3} \end{aligned}$$

Answer (1 point)

$$= \underline{6.5 \text{ mm}} \quad (2\text{sf})$$

Chap 15 Problem. A block is on a horizontal surface (a shake table) that is moving back and forth horizontally with simple harmonic motion of frequency 2.0 Hz. The coefficient of static friction between block and surface is 0.50. How great can the amplitude of the SHM be if the block is not to slip along the surface?


Diagram/Description (2 points)

SHM force from static friction F_s
 F_s is max on verge of slipping,
occurs when when SHM a_x is max

$$\mu_s = 0.5$$

SHM frequency $f = 2.0 \text{ Hz}$

SHM amplitude A required

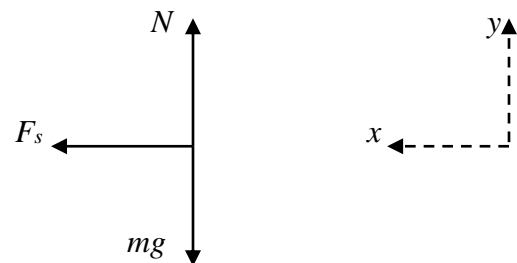

Idea (3 points)

$$F_s < \mu_s N$$

$$\Sigma \underline{F} = m \underline{a}$$

$$x: \quad F_s = m a_x$$

$$y: \quad N - mg = m a_y = 0$$

$$x = A \cos (\omega t + \varphi)$$

$$a_x = d^2x/dt^2 = -A\omega^2 \cos (\omega t + \varphi)$$

$$a_x \text{ max} = A\omega^2$$

Analysis (no points)

$$\mu_s N = ma_x \text{ max}$$

$$\mu_s mg = mA\omega^2$$

$$A = \mu_s g / \omega^2$$

$$= \mu_s g / (2\pi f)^2$$

Numbers (points given in Description for use of data)

$$= 0.50 \times 9.8 / (2 \times \pi \times 2.0)^2$$

$$= 0.0310296$$

Answer (1 point)

$$= \underline{0.031 \text{ m}} \quad (2\text{sf})$$

Chap 17 Problem. A certain sound source is increased in sound level by 30.0 dB. By what multiple is its intensity increased?

Diagram/Description (1 point)

I_1 = initial intensity β_1 = initial sound level

I_2 = final intensity β_2 = final sound level

$\beta_2 = \beta_1 + 30$ Ratio I_2 / I_1 required

Idea (1 point)

$$\beta = 10 \log (I / I_0)$$

Analysis (no points)

$$10 \log (I_2 / I_0) = 10 \log (I_1 / I_0) + 30$$

$$10 \log (I_2 / I_0) - 10 \log (I_1 / I_0) = 30$$

$$10 \log ((I_2 / I_0) / (I_1 / I_0)) = 30$$

$$10 \log (I_2 / I_1) = 30$$

$$I_2 / I_1 = 10^3$$

Answer (1 point)

$$= \underline{1.0 \times 10^3} \quad (2\text{sf})$$