

Ampere's Law

$$\oint_c \mathbf{B} \cdot d\mathbf{l} = \mu_0 I$$


$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J}$$

Long wire

$$B L = \mu_0 I$$


$$B 2\pi r = \mu_0 I$$

$$B = \frac{\mu_0}{2\pi} \frac{I}{r}$$

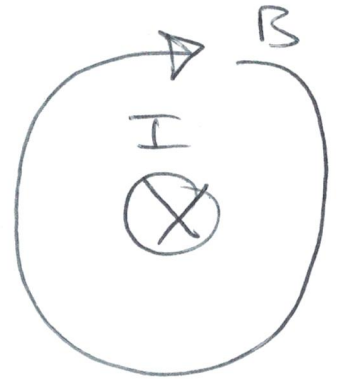

Uniform $\mathbf{J}$

large wire
radius R
with uniform
 $\mathbf{J} = \frac{\mathbf{I}}{A}$

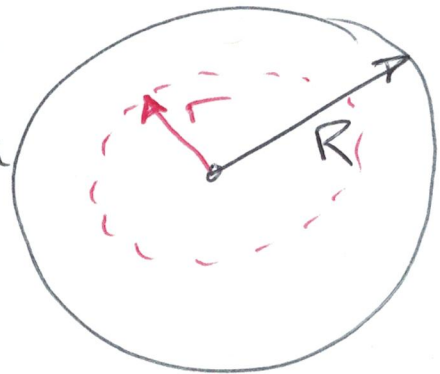

$$B L = \mu_0 I_{enc}$$

$$B(2\pi r) = \mu_0 J \pi r^2$$

$$B = \frac{\mu_0}{2} r J$$

$$I_{enc} = J A_{enc}$$

$$= J \pi r^2$$

$$I_{TOT} = J A_{TOT} = J \pi R^2$$

$$B = \frac{\mu_0}{2\pi} I_{TOT} \frac{r}{R^2}$$


$$J = \frac{I_{TOT}}{\pi R^2}$$

Sanity Check

$$r \rightarrow R \quad B \rightarrow \frac{\mu_0}{2\pi} \frac{I}{R}$$

checks w/
above!!!

Solenoid
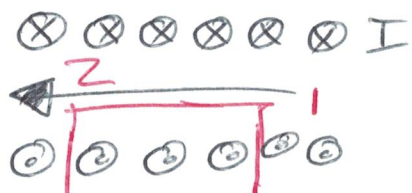
$$\oint_C \mathbf{B} \cdot d\mathbf{L} = \mu_0 I_{enc} \quad \mathbf{B}$$


$$1 \rightarrow 2: \quad \mathbf{B} \cdot d\mathbf{L} = \mu_0 N I \quad 3 \quad 4$$

$$2 \rightarrow 3: \quad \mathbf{B} \cdot d\mathbf{L} = 0$$


$$3 \rightarrow 4: \quad \mathbf{B} = 0$$

$$4 \rightarrow 1: \quad \mathbf{B} \cdot d\mathbf{L} = 0$$

$$\mathbf{B} = \mu_0 \frac{N I}{L} = \mu_0 n I$$

$$n = \frac{N}{L} = \frac{\# \text{ Turns}}{\text{length}}$$

Toroid

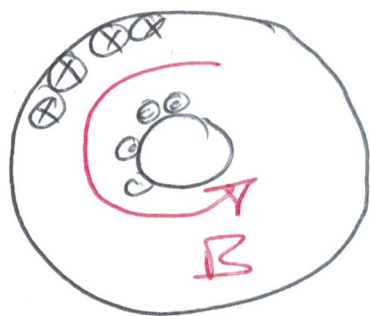

$$\oint \mathbf{B} \cdot d\mathbf{L} = \mu_0 I_{enc}$$

$$\mathbf{B} 2\pi r = \mu_0 N I$$

$$\mathbf{B} = \frac{\mu_0}{2\pi} \frac{N I}{r}$$

Displacement Current


$$\oint \mathbf{B} \cdot d\mathbf{L} = \mu_0 I_{\text{enc}} \quad \mathbf{I}$$

Solution

$$\oint \mathbf{B} \cdot d\mathbf{L} = \mu_0 I + \epsilon_0 \frac{d\Phi_E}{dt}$$

resolves problem

Surface #2 $I = 0?$ Surface #1 $I = I_{\text{enc}}$

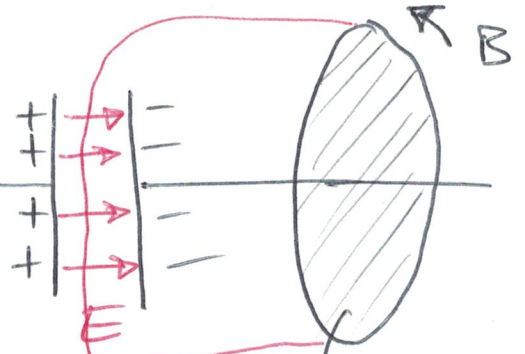

Maxwells Eq

$$\oint \mathbf{E} \cdot d\mathbf{A} = \frac{Q}{\epsilon_0}$$

$$\oint \mathbf{B} \cdot d\mathbf{A} = 0$$

$$\oint \mathbf{E} \cdot d\mathbf{L} = - \frac{d\Phi_B}{dt}$$

$$\oint \mathbf{B} \cdot d\mathbf{L} = \mu_0 I + \epsilon_0 \frac{d\Phi_E}{dt}$$

$$\nabla \cdot \mathbf{E} = \frac{\rho}{\epsilon_0}$$

$$\nabla \cdot \mathbf{B} = 0$$

$$\nabla \times \mathbf{E} = - \frac{\partial \mathbf{B}}{\partial t}$$

$$\nabla \times \mathbf{B} = \mu_0 \mathbf{J} + \mu_0 \epsilon_0 \frac{\partial \mathbf{E}}{\partial t}$$

Question

What if Magnetic Monopoles Exist?

Maxwells Eq in Vacuum:

4

$$\nabla \cdot E = 0$$

$$\nabla \times E = -\frac{\partial B}{\partial t}$$

$$\nabla \cdot B = 0$$

$$\nabla \times B = \mu_0 \epsilon_0 \frac{\partial E}{\partial t}$$

$$\nabla \times (\nabla \times E = -\frac{\partial B}{\partial t})$$

$$\nabla \times (\nabla \times E) = -\frac{\partial}{\partial t} (\nabla \times B)$$

$$\rightarrow \mu_0 \epsilon_0 \frac{\partial E}{\partial t}$$

$$\nabla \times (\nabla \times E) = \nabla(\nabla \cdot E) - \nabla^2 E$$

$$\rightarrow 0$$

oo

$$+ \nabla^2 E = + \mu_0 \epsilon_0 \frac{\partial^2 E}{\partial t^2}$$

Wave Equation

Guess $E = E_0 e^{i(Kx + \omega t)}$

$$\nabla^2 E = -K^2 E$$

$$v = \frac{\omega}{K}$$

$$\omega \sim \frac{1}{\text{sec}}$$

$$K \sim \frac{1}{\text{meters}}$$

$$\frac{\partial^2 E}{\partial t^2} = -\omega^2 E$$

$$\rightarrow K^2 = \mu_0 \epsilon_0 \omega^2 \Rightarrow \frac{\omega^2}{K^2} = \frac{1}{\mu_0 \epsilon_0} = v^2$$

$$v = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$$

$$\epsilon_0 = 8.85 \times 10^{-12} \frac{\text{Farads}}{\text{m}}$$

$$\mu_0 = 1.26 \times 10^{-6} \frac{\text{H}}{\text{m}}$$

$$v = c = 3 \times 10^8 \text{ m/s}$$